



Low-impedance | Isolation transformer | 3 stage protection

ILc model
2400-230V
10 amps 2400 VA 2400 watts 208/220, 230/240 volts
3600-230V
15 amps 3600 VA 3600 watts 208/220, 230/240 volts

Isolation Transformer Line Conditioner

TSi Power's ILc Series line conditioners provide the best all-round power conditioning and surge protection for sensitive electronic equipment. The integral isolation transformer provides 100% isolation from the input ac line ~ the secondary neutral-to-ground bond eliminates all surge voltages between neutral and ground. Surge protection and noise filtering are superior to conventional surge protection/filtering devices.

Typical applications

Designed for situations where reliability and predictability matter to the enterprise. Examples include: point-of-sale terminals, tele-communications equipment, file servers, routers, digital copiers, office machines, industrial controllers (PLC), automatic test equipment (ATE), laboratory analyzers and other sensitive, specialized microprocessor-based equipment.

Key benefits

ILc Series conditioners reduce the need for a high quality ground and a dedicated line, while eliminating interference from adjacent sources of disturbances. ILc contributes to enhanced operation, improved repeatability, fewer reboots and system lock-ups and extended operating life. In addition, a reduction in equipment down time and service costs can be expected.

How ILc conditioners work

The integral isolation transformer provides complete isolation between the primary and secondary, and permits bonding its output neutral to ground, which completely eliminates all disturbances between neutral and ground, regardless of source. The series inductance of the isolation transformer in combination with a capacitive element and an MOV, provide superb noise filtering, as well as coordinated multi-stage surge protection in accordance with the principles of IEC-61312.3.



Key features of the ILc series isolation line conditioner

- Coordinated multi-stage surge suppression
- Low-impedance isolation transformer
- True isolation
- Common-mode noise elimination
- Advanced noise and interference filter reduces dV/dt from 6kV/μS to less than 10V/μS
- High efficiency
- On/off rocker style power switch
- Low weight
- Quiet operation
- Five year warranty



TSi Power Corporation
 Represented by
 CareBase
 Michael Gibson
 Post Office Box 2987
 Glenwood Springs, CO
 81602-2987 USA
 Phone +1 970 945 2770
 800 430 2770 (USA.CAN)
 michaelg@carebase.com
 www.carebase.com
 Copyright © 2006 TSi



Isolation transformer line conditioner




Rear view with optional receptacles

Specification	ILc-2400-230V	ILc-3600-230V
Electrical		
Capacity in VA (watts)	2400VA (2400W)	3600VA (3600W)
Transformer type	Low-impedance E-I core isolation transformer	
Input		
Nominal voltage	208/220/230 or 240 volts ac, single phase	
Operating voltage	190 to 250 volts ac	
Nominal frequency	60Hz +/-3	
Circuit breaker rating	15 amps	20 amps
6 foot ac input cord with	Hardwire (terminal block connector)	
Output		
Nominal voltage	208/220/230 or 240 volts ac, single phase	
Power efficiency	97% (typical)	
Total harmonic distortion	<1%	
Surge protection	A three-stage surge protection system consisting of isolation transformer, capacitor and M.O.V. is included.	
Surge test conditions	Per ANSI/IEEE C62.41-1991 test waveforms	
Surge let-through voltages	Single pulse: L-N: 50V, L-G: 50V, N-G: 0.5V Ring wave: L-N: 20V, L-G: 20V, N-G: 0.5V Combination wave: L-N: 250V, L-G: 250V, N-G: 0.5V The measured rate of voltage rise/fall (dV/dt) of the remnant waveform is less than 10V/μS with input test waveform dV/dt of 6kV/μS.	
Power on/off	On/off rocker style power switch/circuit breaker	
Indicators	Green LED indicates ac power is present	
Ac output receptacles (Other options available)	Hardwired output terminals (L1, Neutral, and Ground) are standard. Optional ac receptacles are available.	
Physical		
Dimensions	254mm(10")wide x 190mm(7.5")high x 368mm(14.5")deep	
Weight	27.3 kg(60 lbs)	36.3 kg(80 lbs)
Safety		
Agency approvals	Designed to meet UL, cUL standards	
Over-current protection	User resettable circuit breaker	
Environmental		
Ambient temperature	0° to 40°C (32° to 104°F). 10 to 90% relative humidity(non-condensing).	
Warranty		
Warranty	Five year limited warranty, parts and labor.	

TSi's ongoing product improvement process makes specifications subject to change. Other companies product names herein are for identification purposes only, and may be trademarks of their respective companies.

ILc system architecture

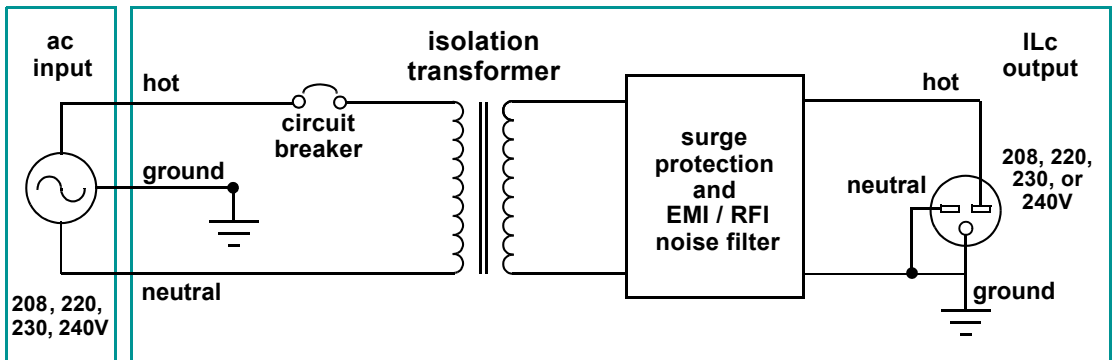

TSi Power Corporation
 Represented by
 CareBase
 Michael Gibson
 Post Office Box 2987
 Glenwood Springs, CO
 81602-2987 USA
 Phone +1 970 945 2770
 800 430 2770 (USA.CAN)
 michaelg@carebase.com
 www.carebase.com
 Copyright © 2006 TSi